


CHLORINE CONTACT TANK

SPECIFICATIONS / STEWART CONCRETE STANDARDS
 5000 PSI MINIMUM AT 28 DAYS
 OPEN TOP (NO LID), NO TRAFFIC LOADS
 MEETS MISSOURI DNR SPECIFICATION 40:1 RATIO

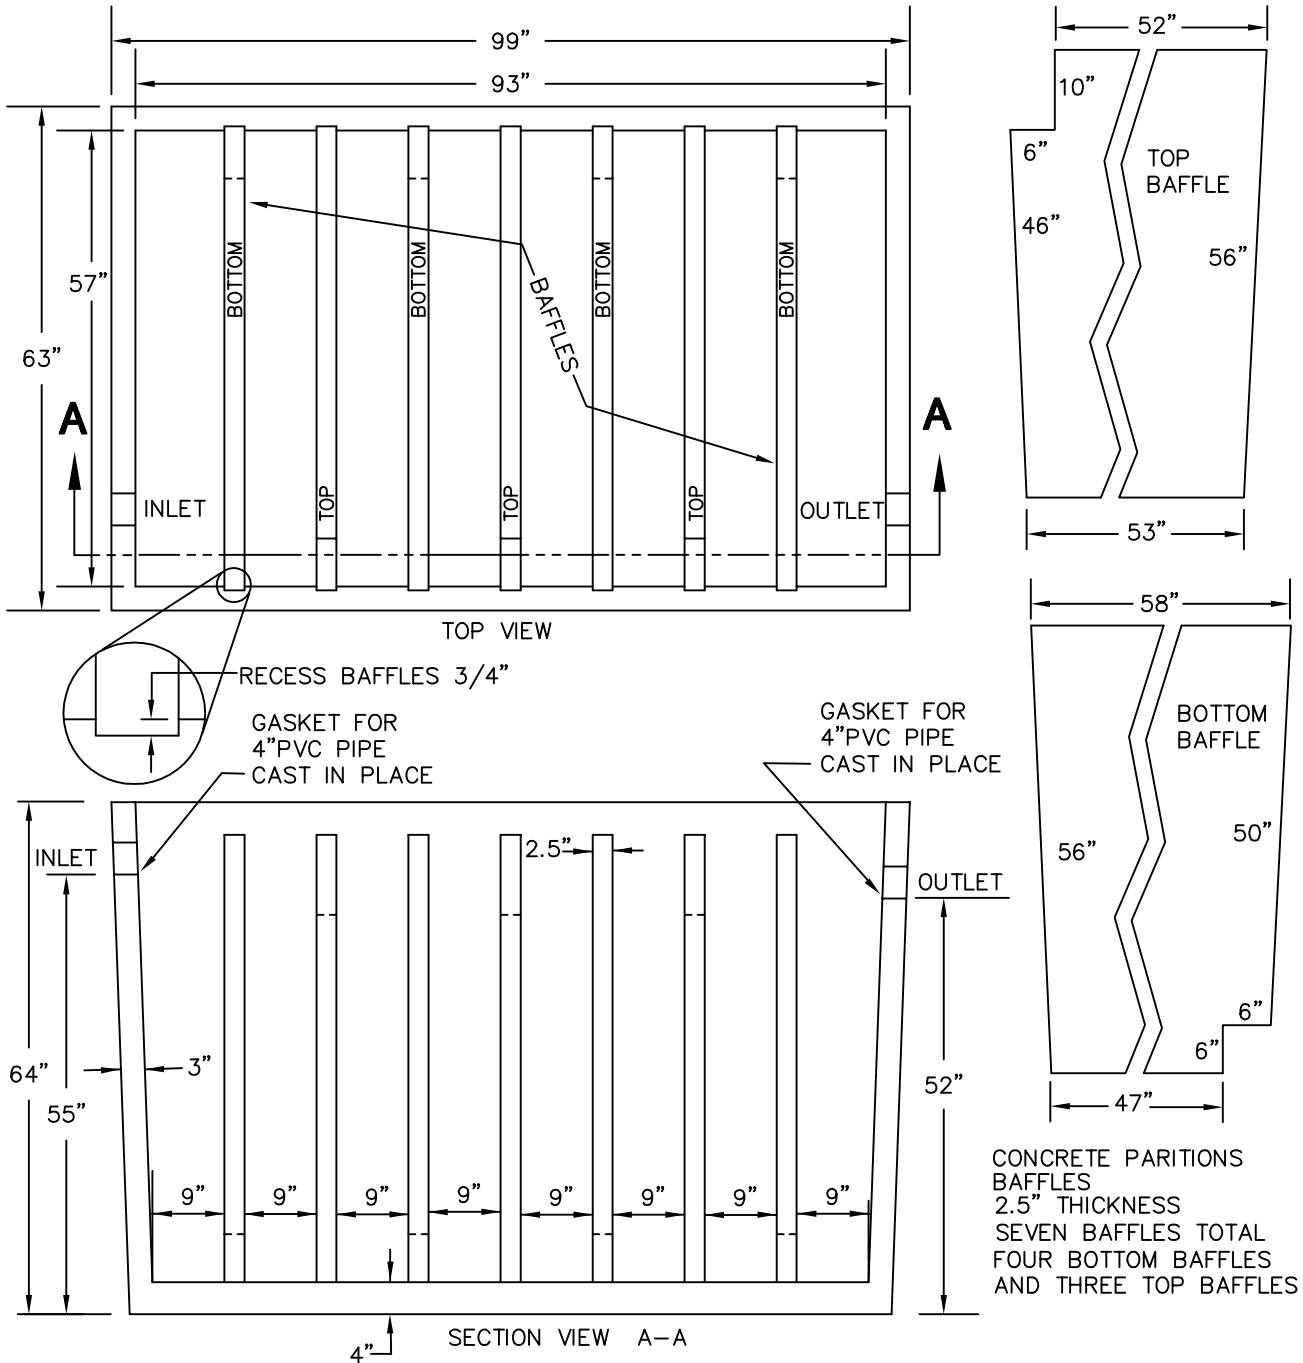

STEWART CONCRETE PRODUCTS
 2179 HIGHWAY 32
 HALFWAY, MISSOURI 65663
 (800) 798-0183 FAX (417) 445-2681

www.stewartconcrete.net